

6人群对讲头盔蓝牙耳机

6-rider Group Intercom Helmet Bluetooth Headset



说明书
Manual



KY PRO

目录

1. 介绍	3
2. 主要功能	3
3. 按键介绍	4
4. 包装内容	5
5. 安装步骤	6
6. 功能图解	7
7. 按键功能及操作	8
7.1 开关机键/对讲键	8
7.2 多功能键/旋钮	10
8. 配对方式	12
8.1 与手机、MP3、GPS配对	12
8.2 两台KY Pro配对	13
8.3 与第三方蓝牙耳机配对	14
9. 群组通话设置（6人对讲为例）	15
10. 群对讲时一方有来电操作方式	16
11. 群对讲时成员如何退出对讲与再次进入对讲	16
12. 连接多台设备	17
13. 功能优先级	17
14. 产品技术参数	18
15. 电池电量指示功能	18

Contents:

1.Introduction	19
2.Main Features	19
3.Buttons and Ports	20
4. Packing List	21
5. Installations	22
6. Functions' Diagram	23
7.Operation of the Buttons	24
7.1 On/Off Button & Intercom Button	24
7.2 Multi-function Button & Wheel	26
8.Bluetooth Pairing Method	28
8.1 Pair with Phone/MP3/GPS	28
8.2 Pair with Another KY-Pro	29
8.3 Pair with Other Brands' Headset	30
9.Operations for Group Intercom(6-rider intercom as example)	31
10. Operations for the coming phone call during the group intercom	32
11.How to exit from the group intercom and re-join	32
12.Connecting Multiple Devices	33
13.Function Priority	33
14.Product Specifications	34
15.Battery Indicator	34

1. 介绍

感谢您选择FreedConn KY Pro摩托车蓝牙对讲系统。

KY Pro为全双工群对讲蓝牙系统，它是一款人性化设计的、集同类产品优秀性能于一体的、完美的摩托车通讯系统。它能够满足您旅程中的所有通讯需求，可以无线拨出、接听电话、收听Mp3音乐、接收GPS语音提示，还可以连接手持对讲机。最重要的是，它可以实现摩托车之间的群对讲，让您在旅程中时刻保持著与队友们之间的便利沟通。



2. 主要功能

1. 对讲距离1000米，链状连接，连接人数6人，最佳状态4人。
2. 多台设备同时连接，可与第三方蓝牙耳机连接。
3. 有线连接PPT手持对讲机。
4. 内置收音机功能。
5. 语音提示。
6. 可在充电时使用。

3. 按键介绍



1. 开关机键 / 对讲键

2. 旋钮 / 多功能键

3. 充电插口

4. 耳机插口

5. LED指示灯

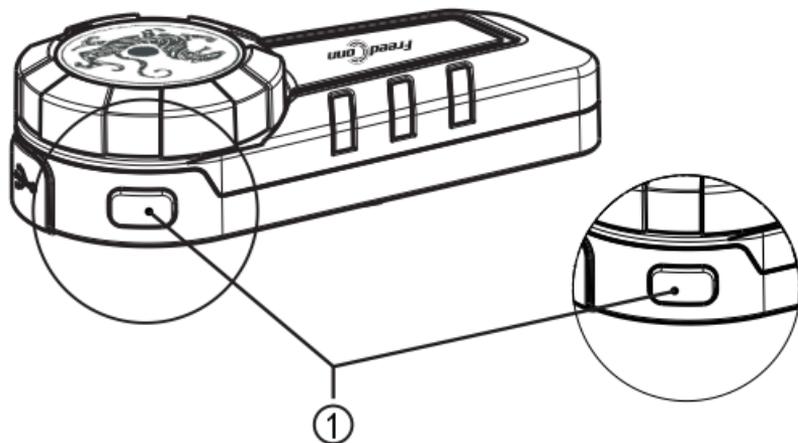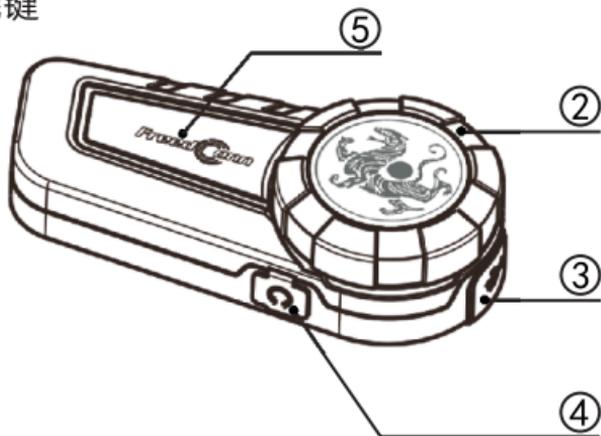


4. 包装内容

- 蓝牙主机




- 麦克风&喇叭



- 耳机魔术贴




- USB数据线




- 塑料夹子
&魔术贴夹子



- 说明书



- 对讲机控制线



- PTT魔术贴粘带



5. 安装步骤

1. 主要讲解提供的两款夹子中的可拆卸式夹子(如图1)。
2. 拨开头盔内衬, 将耳机夹子卡入头盔左边合适位置(如图2、3)。
3. 将蓝牙主机对应夹子的孔卡入, 确保主机安装到位无松动(如图4、5)。




图 1



图 2




图 3



图 4



图 5

4. 找到头盔离耳朵最近处, 揭开头盔内衬, 清理干净后贴上魔术贴毛面(如图6)。
5. 将贴有魔术贴勾面的喇叭对应魔术贴毛面贴好并整理好头盔内衬(如图7)。
6. 将耳机插头对应蓝牙主体耳机插口插入即安装完成(如图8)。




图 6

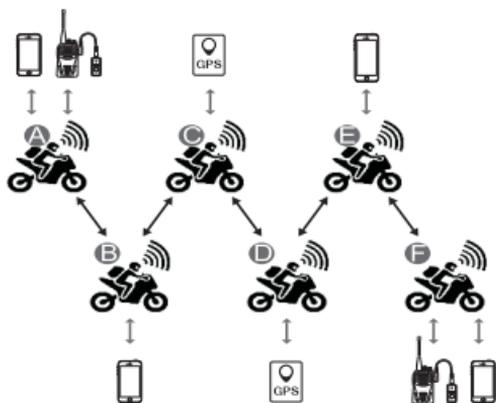


图 7

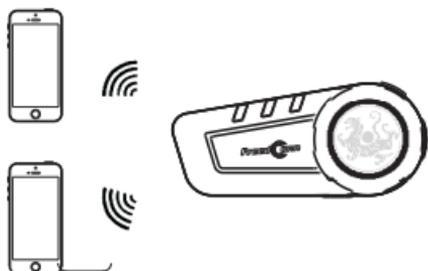


图 8

6.功能图解




- ① 对讲距离1000米，6人连接，可支持同时连接多台设备（手机、GPS、L2适配器）。



- ② 可同时连两台手机,呼出、接听、拒绝接听、挂断电话、语音拨号和音乐播放。




L2适配器

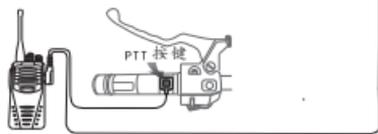

对讲机控制线

- ③ 通过蓝牙适配器或对讲机控制线两种方式连接对讲机。



- ④ 充电电池 (可充电时 使用)

- ⑤ 调频收音

- ⑥ 语音提示

- ⑦ 噪音抑制

- ⑧ 防水防尘

7. 按键功能及操作

7.1 开关机键/对讲键



- 7.1.1 开机
- 7.1.2 关机
- 7.1.3 启动蓝牙对讲通话
- 7.1.4 结束蓝牙对讲通话
- 7.1.5 对讲/音乐切换
- 7.1.6 打开与关闭音乐分享
(只限2人之间分享)
- 7.1.7 中英语音切换
- 7.1.8 清除配对记录

注意: 清除功能将清除所有记忆

7.1.1	按住开机键约3秒，听到提示音“欢迎使用FreedConn产品”提示音松手，蓝灯快速闪三下后转入有规律的闪动。
7.1.2	按住开机键约3秒，听到提示音“关机”后松手。红色指示灯常亮一下熄灭。
7.1.3	短按一下两配对过的KY Pro中任意其中一个多功能键，对讲连接成功后会听到“对讲已连接”提示音
7.1.4	短按一下，听到“对讲已断开”提示音后对讲结束。
7.1.5	对讲模式按一下，有听到“对讲已断开”提示音后对讲结束，对讲结束恢复到音乐模式。
7.1.6	打开与关闭音乐分享（只限2人之间分享）：两台机器配对后，分享音乐之前手机音乐需先暂停，在没有进入对讲状态下双击其中任意一台与手机蓝牙连接机器的“开关机键/对讲键”，待提示“打开分享”后在播放音乐，此时另一台机器将收到你分享的音乐。如需停止分享，分享方需先暂停音乐，然后双击“开关机键/对讲键”，提示“关闭分享”后关闭分享。（注意：3台以上机器配过对的情况下将不支持音乐分享功能）
7.1.7	同时按住“开关机键/对讲键”+“多功能键”可在中英文之间切换。
7.1.8	开机时按住“开关机键/对讲机键”看到红灯亮时不要松手继续再按住3秒，看到红灯快闪3下，提示音“嘟嘟”，清除成功并关机。（正常按5秒关机不清除记录）

注意：清除功能将清除所有记忆。

7.2 多功能键/旋钮



- 7.2.1 接听来电
- 7.2.2 拒接来电
- 7.2.3 电话语音切换
- 7.2.4 终止通话
- 7.2.5 语音呼叫

7.2.1	按一下,有“电话接听”提示音,当来电响铃10秒后无任何操作时将自动接听来电。
7.2.2	听到铃声时按住2秒,听到“电话拒接”,松手。
7.2.3	电话通话声音在手机与KY Pro听筒之间切换,按住2秒,听到“嘀”声松手。
7.2.4	按一下或正常使用手机电结束通话。
7.2.5	长按多功能键2秒,听见“语音呼叫”。



- 7.2.6 音乐播放/暂停
- 7.2.7 音乐与FM切换
- 7.2.8 收音机播放/暂停
- 7.2.9 电话与电话切换
- 7.2.10 电话与对讲之间切换
- 7.2.11 对讲与电话之间切换
- 7.2.12 收音机调频
- 7.2.13 音乐播放控制
- 7.2.14 音量调节

7.2.6	手机播放音乐时，按一下暂停，再按一下播放。
7.2.7	音乐模式下连续按两下切换到FM，再按两下切回音乐模式。
7.2.8	FM状态下，按一下暂停，再按一下播放。
7.2.9	同时连接A、B两台手机，A在通话时B有来电，按一下多功能键结束A通话，再按一下多功能键接通B来电。
7.2.10	在对讲时来电话，按一下接通来电，电话结束后对讲自动恢复。
7.2.11	在通电话时来对讲邀请，按一下结束电话，对讲自动切换进来。
7.2.12	顺时针旋转一下旋钮换下一频段，逆时针旋转一下旋钮换上一频段。
7.2.13	顺时针旋转一下旋钮换下一曲，逆时针旋转一下旋钮换上一曲。
7.2.14	顺时针旋转并按住旋钮不放，音量增大，增大至您想要的音量时放手，最大时会有“嘟嘟”提示音；逆时针旋转并按住旋钮不放，音量减小，减小至您想要的音量时放手，最小时会有“嘟嘟”提示音。

8. 配对方式

8.1 与手机、MP3、GPS配对



第一步：确保KY Pro为关机状态，将待配对设备放在1米可视范围内。

第二步：按住KY Pro开关机键8秒听到语音提示“配对状态”，英文版提示“Pairing”时松手，此时，指示灯红蓝灯交替闪烁，KY Pro进入待配对状态。

第三步：打开待配对设备的蓝牙，搜索并选择KY Pro配对，您会听到语音提示“蓝牙已连接”，英文版提示“connected”，待指示灯进入蓝灯有规律的闪烁后，表示配对已成功。

8.2 两台KY Pro配对




第一步：确保两台KY Pro都为关机状态，并放在1米可视范围内。

第二步：同时按住两台KY Pro的开关机键8秒，听到语音提示“配对状态”，时松手；此时，指示灯红蓝灯交替闪烁，KY Pro进入待配对状态。

注意：如果不能进入红蓝灯交替闪烁状态，请先进行清除配对记录操作，然后再重复以上操作。

第三步：按一下其中一台KY Pro的开关机键，它会自动搜索另一台KY Pro进行配对，你会听到语音提示“对讲已连接”，待指示灯进入蓝灯有规律的闪烁后，表示配对已成功。

8.3 与第三方蓝牙耳机配对

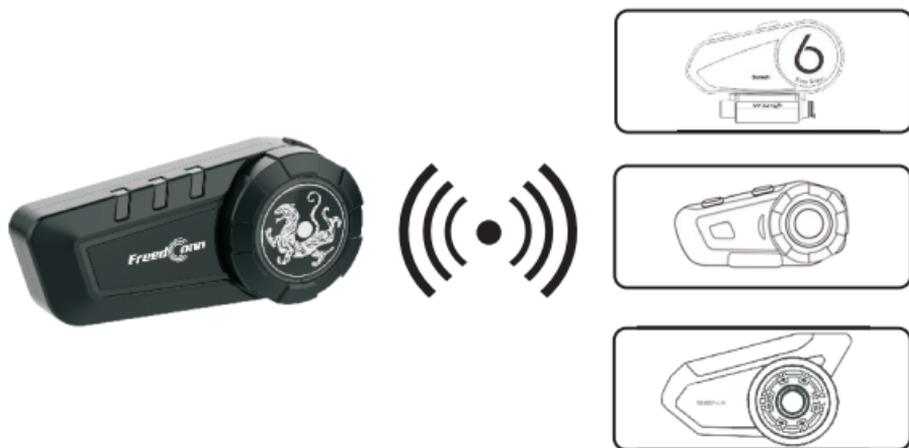

第一步：确保KY Pro与其它蓝牙耳机都为关机状态，并放在1米可视范围内。


第二步：按住KY Pro开关机键3秒，听到“欢迎使用FreedConn产品”提示音松手，蓝灯快速闪三下后转入有规律的闪动。
(注意不要进入配对状态)

第三步：长按KY Pro多功能键8秒进入与第三方配对状态（如果设备清除过配对记录，按开机键3秒松手后等待3秒会自动进入第三方设备配对状态，此时红蓝灯交替闪烁），第三方蓝牙耳机按其对应的说明书操作步骤进入配对状态。

第四步：按一下KY Pro的开关机键，它会自动搜索另一台不同品牌的蓝牙耳机进行配对，你会听到语音提示“对讲已连接”，待指示灯进入蓝灯有规律的闪烁后，表示配对已成功。

(注意事项：与第三方蓝牙连接时，第三方蓝牙设备只能作为从机，在群对讲串连时，只能用在首尾，比如说ABCD 四台机器串连，第三方蓝牙设备作为从机只能用在A、D两个位置)

9. 群组通话设置（6人对讲）

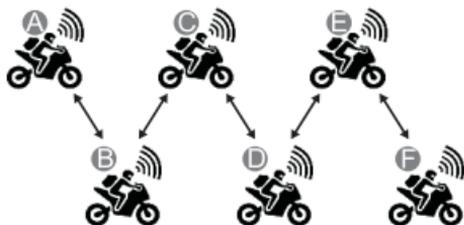

注意：首尾队员（如图中A和F）决不能配对连接。



第一步：清除A、F的配对记录。

按住A、F的开关机键8秒，听到提示音“关机”继续按住3秒。红灯闪三下表示清除成功。

第二步：以下操作参考8.2的配对操作方式。

1. A与B配对，配对完成后，将B关机；（注意：只是关机，不要清除配对记录）
2. B与C配对，配对完成后，将C关机；
3. C与D配对，配对完成后，将D关机；
4. D与E配对，配对完成后，将E关机；
5. E与F配对。

（此时，ABCDEF都为开机状态。）

第三步：将ABCDEF进行串连。

1. D按一下开关机键连到E，会听到一串对讲提示音；
 2. C按一下开关机键连到D，会听到一串对讲提示音；
 3. B按一下开关机键连到C，会听到一串对讲提示音；
 4. A按一下开关机键连到B，会听到一串对讲提示音；
- （此时，ABCDEF配对成功，可以进入群组通话。）


10.群对讲时一方有来电操作方式

在6人群对讲时，C成员有来电，则群对讲从C成员处断开（A和B连接成一组，C单独成一组，DEF连接成一组）。



C成员结束通话后，自动连入群对讲队伍中，6人群对讲恢复正常。

11.群对讲时成员如何退出对讲与再次进入对讲

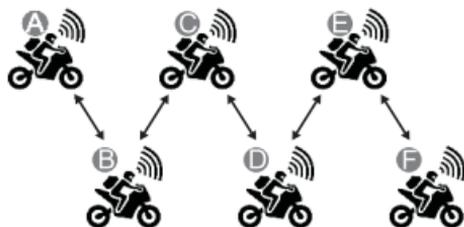

注意：首尾队员（如图中A和F）决不能配对连接。




以6人群对讲为例，如果E想与其它成员断开对讲，可以短按一下多功能键，语音提示“对讲已断开”，此时E将与其它队员断开连接，当E想重新接入与其它队员对讲时，可以短按一次多功能键，会听到“对讲已连接”，此时将与F连接，可以与F成员对讲，再次连续按两下多功能键将与D成员进行连接，会听到“对讲已连接”此时E成员就可以与所有队员对讲。

注意：群对讲时按一次多功能键是与后面成员进行连接，按二次是与前面队员进行连接)

12. 连接多台设备

群对讲成员在与队友连接的同时，还可以再连接多台设备
(手机、GPS、适配器)

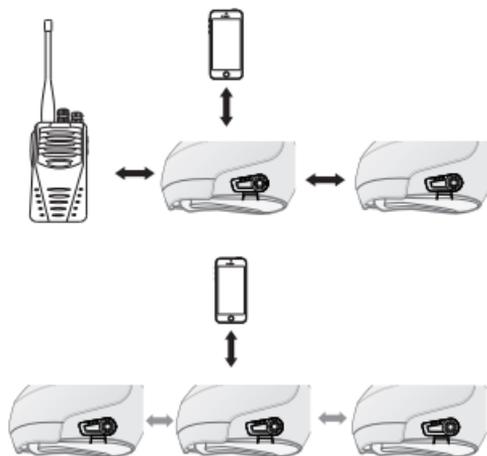

① 排在群组首尾的成员 (A和F)，除了与一位队友连接外，还可以再连接手机、GPS、适配器中任意两台设备

② 排在群组中间的成员 (B、C、D、E)，除了与两位队友连接外，还可以再连接手机、GPS、适配器中任意一台设备。

13. 功能优先级

一级：电话/通过K线接进来的对讲机音频

二级：蓝牙对讲

三级：音乐/收音电台

解析：

1. 电话时，K线连接进来的对讲机对讲、蓝牙对讲、音乐、收音电台都不能进行操作，但来对讲机对讲邀请和蓝牙对讲邀请时，会有串音提示音。

2. 对讲机通话时，蓝牙对讲、音乐、收音电台都不能操作，但来蓝牙对讲时有提示音。

3. 蓝牙对讲时，音乐和收音电台不能操作。

(对讲机控制线接进来的对讲不受优先级影响，它可以与电话、音乐、收音电台同时进行。)

14. 产品技术参数

频率：2.4吉赫兹

连续工作时间：

重量：38克 充电时间：1小时左右

手机通话11小时

尺寸：90x40x26.5毫米

蓝牙对讲9.5小时

电池容量：500毫安时

充电时间：1小时左右

待机时间：1周

电源适配器：直流电5V/1A

15. 电池电量指示功能

本产品使用聚合物电池，请确保放置在干燥的地方，若放置超过一个月要按时给予充电，以保证产品的使用寿命。

1. 电池电量充足，开机时，蓝灯每两秒双闪一次。
2. 低电量时报警启动。间隔15秒会有低电报警提示（语音提示“电池电量低”，红灯每15秒闪一次），继续使用则会自动关机。
3. 充电时红灯常亮，充满后灭。如再继续连接电源红灯会闪一下再灭。
4. 本产品可在充电时使用

1. Introduction

Welcome to use FreedConn "KY Pro" model motorcycle helmet bluetooth intercom headset.

KY Pro is a full duplex bluetooth intercom system, which integrates the strength of the similar products with unique design. It supports all the communication request during your riding, such as answering the Phone calls, listening to the music from Phone, receiving the voice reminder from the GPS and connecting to the walkie-talkie. Most importantly, it supports the group intercom within the group with other riders.



2. Main functions

1. Up to 1000M intercom range, max 6 riders connection(4-rider connection is the best situation).
2. Multiple devices connection at the same time, can be connected with other brands.
3. Support to connect with PTT hand-hold walkie-talkie
4. Carry FM radio
5. Voice reminder
6. Can be used while charging

3. Buttons and Ports



1. On/Off Button & Intercom Button

2. Wheel/Multi-function Button

3. Charging Port

4. Earphone Port

5. LED Indicator

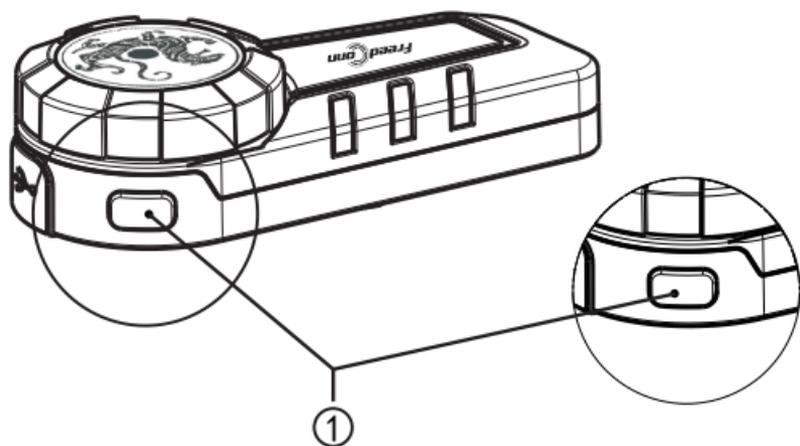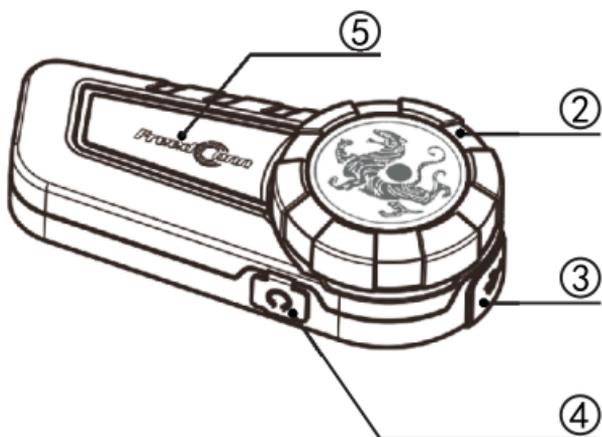

4.Packing List

- Bluetooth Receiver




- Earphone Vecro Stickers




- Plastic Clip&Vecro Clip




- Walkie-talkie Control Line




- Microphone&Speaker



- USB Cable



- Manual



- PTT Vecro Tape



5. Installations


1. Each pack includes Velcro Clip and Detachable Clip. Here we show how to use Detachable Clip. (Pic. 1)
2. Remove the helmet lining of the bottom edge on the left side and insert the metal clip into the edge of the helmet. (Pic. 2-3)
3. Place the "KY"/"KY PRO" bluetooth onto the plastic clip firmly according the slot on the clip and then fix it onto the metal clip according to the hole without any loose. (Pic. 4-5)



Pic. 1




Pic. 2



Pic. 3



Pic. 4



Pic. 5

4. Find the nearset points to the ears on the helmet edge. Then open the helmet lining and paste the Vecro tapes onto the inner surface of the helmet. (Pic. 6)
5. Paste the Speakers onto the Vecro tapes and then re-cover the helmet lining properly.(Pic. 7)
6. Plug the headphone into the port to finish the installations. (Pic. 8)



Pic. 6




Pic. 7




Pic. 8

6. Functions' Diagram

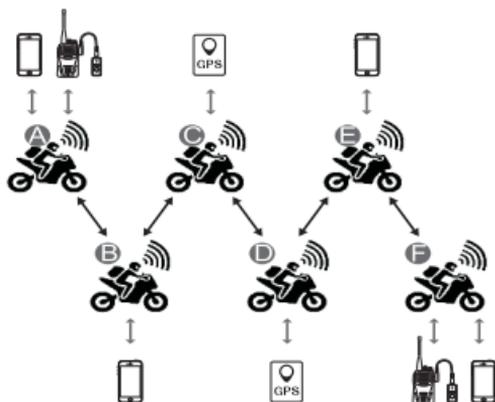


- ① Intercom range is up to 1000M, max 6-rider wireless connection, supporting multiple devices connection at the same time, such as Phone, GPS and L2 Adaptor.

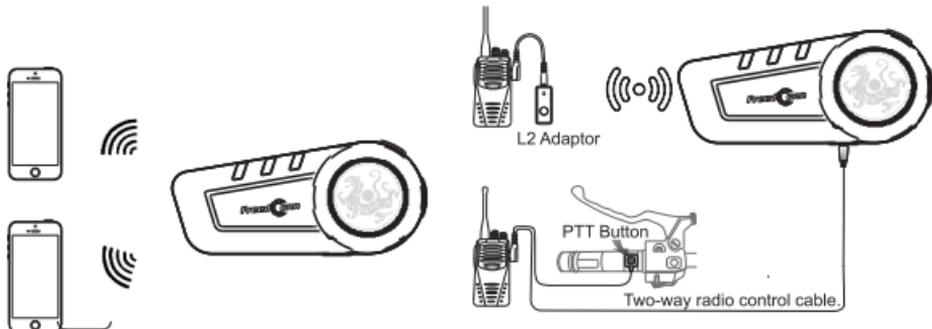

② It supports to connect with two Phones at the same time, doing the operations like making Phone calls, answering Phone calls, rejecting Phone calls, handing up Phone calls, voice dialing, music playing and so on.

③ Connect with the walkie-talkie via Bluetooth Adaptor or PTT Controlling Line.



④ Rechargeable Battery (Bluetooth receiver can be used while charging)

⑤ FM Radio

⑥ Voice Reminder

⑦ Noise Suppression

⑧ Water-proof and Dust-proof

7. Operation of the Buttons

7.1 On/Off Button&Intercom Button



7.1.1 Turn On

7.1.2 Turn Off

7.1.3 Start the Bluetooth Intercom

7.1.4 End the Bluetooth Intercom

7.1.5 Intercom/Bluetooth Switch

7.1.6 Turn on and turn off the music sharing (only between two users)

7.1.7 CN/EN language Switch

7.1.8 Clear the Pairing Records

Attention: the operation for clearing the pairing records will clear all the pairing log

7. 1. 1	Press and hold the On/Off button for 3s until hearing the voice reminder "Welcome to use FreedConn Product". Then the indicator will flash for 3 times quickly and turn to the regular blue light.
7. 1. 2	Press and hold the On/Off button for 3s until hearing the voice reminder "Power Off". The indicator will become red and then off.
7. 1. 3	Press the multi-function button for once on any one of the paired "KY Pro" to start the Intercom, you will hear the "Intercom Connected" voice reminder after successfully.
7. 1. 4	Press the multi-function button for once on any one of the paired "KY Pro" to end the Intercom, you will hear the "Intercom Disconnected" voice reminder.
7. 1. 5	In the Intercom mode, press the multi-function button for once on any one of the "KY Pro" to end the Intercom and back to the music mode.
7. 1. 6	After pairing the two bluetooth headsets, you need to double-click the intercom button on the one that has been connected with your Phone to activate the music sharing function before playing the music. After hearing the voice reminder "start share", you could start the music now and share it with your following user. If you need to turn off the music sharing, you should suspend the music on the master bluetooth headset firstly and then double-click the intercom button. After that, you will hear voice reminder "stop share". (Note: if the bluetooth headset has been paired with over three devices, it doesn't support to use music sharing function.)
7. 1. 7	Press and hold the Intercom button and the MFB to switch the language between English and Chinese.
7. 1. 8	Press and hold the On/Off button until the indicator flashes quickly for 3 time with the red color". After that, there will be "DuDu" voice reminder and turn off. (Turn off the Bluetooth normally will not clear the pairing records

Attention: the operation for clearing the pairing records will clear all the pairing log.

7. 2 Multi-function Button & Wheel



- 7.2.1 Answer coming phone calls
- 7.2.2 Reject coming phone calls
- 7.2.3 Phone/Intercom Switch
- 7.2.4 End the Phone Call
- 7.2.5 Voice Dial

7. 2. 1	Press the multi-function button for once when there is coming phone call , you will hear "Phone Answering" voice reminder. If the coming phone call lasts over 10s and no answer, the "KY Pro" will help to answer it automatically.
7. 2. 2	Press and hold the multi-function button for 2s until hearing the voice reminder "Phone Rejected" to reject the coming phone call.
7. 2. 3	Press the multi-function button for 2s until hearing the voice reminder "Di" to switch the Phone Calling voice btween the Phone and the speaker of "KY Pro".
7. 2. 4	Press the multi-function button for once or operate on the Phone to end the Phone Calling.
7. 2. 5	long press the multi-function button for 2s, you will hear the voice reminder "Voice Calling".



- 7.2.6 Play/Pause Music
- 7.2.7 Switch between Music and FM
- 7.2.8 Play/Pause FM
- 7.2.9 Switch between two Phones
- 7.2.10 Switch between Phone Call and Bluetooth Intercom
- 7.2.11 Switch between Bluetooth Intercom and Phone Call
- 7.2.12 FM Radio
- 7.2.13 Music Playing Control
- 7.2.14 Volume Adjustment

7. 2. 6	In the music mode, click the multi-function button for once to pause and one more click to re-play the music.
7. 2. 7	In the music mode, click the multi-function button for 2 times to switch to FM mode, and click the multi-function button for 2 times to return to music mode.
7. 2. 8	In the FM mode, click the multi-function button for once to pause and one more click to re-play the FM.
7. 2. 9	When A Phone is in the calling status and there is also coming phone call on B, press the multi-function button for once to end the A Phone calling and one more press to answer B Phone calling.
7. 2. 10	Click the multi-function button for once to answer the coming Phone call when the Bluetooth is in the intercom status. After ending the Phone call, the bluetooth intercom will be resumed automatically.
7. 2. 11	When the Phone is in the calling status and there is also Bluetooth Intercom request, you need to click the multi-function button for once to end the Phone calling and then the Bluetooth Intercom will be connected automatically.
7. 2. 12	In the FM mode, turn the wheel clockwise to play next channel and turn the wheel anti-clockwise to play last channel.
7. 2. 13	In the music mode, turn the wheel clockwise to play next song and turn the wheel anti-clockwise to play last song.
7. 2. 14	Turn the wheel clockwise to the end and hold it until the volume rises to the your preferred level. Turn the wheel anti-clockwise to the end and hold it until the volume decreases to your preferred level. When it reaches to the Maximum or Minimum level, there will be "Beep" reminder.

8. Bluetooth Pairing Method

8.1 Pair with Phone/MP3/GPS



- (1) Keep the "KY Pro" turn off. and place the "KY Pro" near your other Bluetooth Devices within 1 meter.
- (2) Press and hold the On/Off button for 8s on "KY Pro" until the indicator becomes flashing blue and red color. After that, you will hear the voice reminder "Pairing".
- (3) Activate the Bluetooth function on your phone search "KY Pro" to connect. After connected successfully, you will hear the voice reminder "Connected".

8.2 Pair with another KY-Pro






- (1)Keep the “KY Pro” turn off. and place all the “KY Pro” within 1 meter.
- (2)Press and hold the On/Off button for 8s on both of “KY Pro” until the indicator becomes flashing blue and red color. After that, you will hear the voice reminder “Pairing” .

Attention: if the “KY Pro” can not turn into the pairing mode as the above instruction, you need to do the operation of clearing the pairing records.

- (3)Click the On/Off button on one of them, and then they will search and connect automatically. After successfully, you will hear the voice reminder “Intercom Connected” and the indicator will become regular blue light.

8.3 Pair with Other Brands' Headset




- (1) Keep the “KY Pro” and all the other Bluetooth Receivers in the off status and place all of them within 1 meter.
- (2) Press and hold the On/Off button for 3s on “KY Pro” until hearing the voice reminder “Welcome to use FreedConn products”. After that, the indicator will flash quickly for 3 times and then turn into regular blue color.

Attention: Don't make the “KY Pro” into the pairing mode in this step.

- (3) Press and hold the multi-function button for 8s on “KY Pro” until the indicator becomes blue&red color (if KY Pro has been operated to clear the pairing records before doing this step, it takes only 3s turning into the pairing mode, instead of 8s). After that, please operate your other brands Bluetooth Receiver according to their manual to turn into the pairing mode.
- (4) Click the On/Off button on KY Pro, then it will search other available Bluetooth Receivers and finish the connection automatically. After successfully, you will hear the voice reminder “Intercom Connected” and the indicator will become regular blue light.

Attention: when connecting with other brands, the other brands can only be the first one or the last one within the group. For example, there is A/B/C/D Bluetooth Headset, other brands can only be placed as A and D

9. Operations for Group Intercom (6-rider intercom as example)

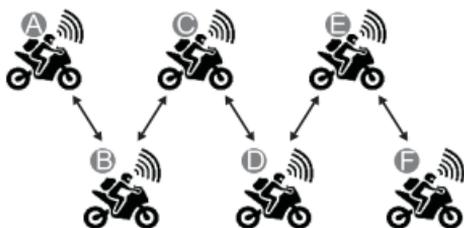

Attention: the first one and the last one can not be connected as the below diagram, otherwise there will be confliction.



(1) Clear the pairing records of the A and F. Press and hold the On/Off button on A and F for 11s. (During this, you will hear the voice reminder "Power Off" at the 8th second, and see the red indicator quickly flashes for 3 times at 11th second).

(2) Please refer to the 8.2 instructions to do the below operation.

- ① Pair A and B. After successfully, turn off B; (attention: only to make B power off, not to clear the pairing records)
- ② Pair B and C. After successfully, turn off C;
- ③ Pair C and D. After successfully, turn off D;
- ④ Pair D and E. After successfully, turn off E;
- ⑤ Pair E and F.

(Now, the A/B/C/D/E/F are turned on.)

(1) Connect A/B/C/D/E/F in a sequence.

- ① Click the On/Off button on D to connect with E. (There will be a voice reminder after successfully.)
- ② Click the On/Off button on C to connect with D. (There will be a voice reminder after successfully.)
- ③ Click the On/Off button on B to connect with C. (There will be a voice reminder after successfully.)
- ④ Click the On/Off button on A to connect with B. (There will be a voice reminder after successfully.)

Now, the A/B/C/D/E/F are paired in a sequence, every one of them can talk and hear in the group.)


10. Operations for the coming phone calls during the group intercom

For example, when the C rider received a coming phone call during the 6-rider group intercom, then the C rider will be disconnected from the bluetooth group intercom. This time A and B is a small group, D, E and F is a small group.



After C rider hand up the phone call, he will automatically join in the group intercom again. Now, the group resumes to be 6 riders.

11. How to exit from the group intercom and re-join?

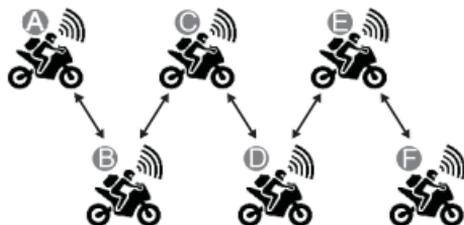

Attention: the first one and the last one can not be connected as the below diagram, otherwise there will be confliction.




For example, if the rider E wants to exit from the group intercom, he needs to click the multi-function button for once. There will be voice reminder “Intercom Disconnected” after successfully. When the rider E wants to re-join the group intercom, click the multi-function button for once to connect with F rider, and one more click will connect with D rider. Every time the connection is successful, there will be voice reminder “Intercom Connected”. Now the E rider can talk and hear in the group as before.

Attention: when re-join the group intercom, one click is to connect with the next rider, one more click is to connect with last rider.

12. Connecting Multiple Devices

All the riders can not only connect in the group intercom, but also connect to other two devices at the same time, such as GPS, Phone and Adaptor.

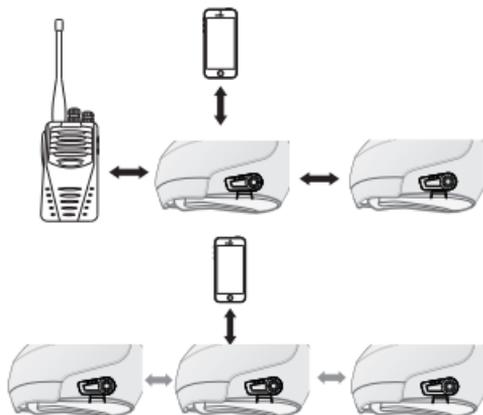

① Riders A and F, can not only connect with their nearby one rider, but also connect with other two devices from GPS, Phone and Adaptor.

② Riders B, C, D, E, can not only connect with their nearby two riders, but also connect with one devices from GPS, Phone and Adaptor.

13. Function Priority

First: Phone call/ Walkie-talkie intercom request from K line

Second: Bluetooth Intercom

Third: Music/FM

Description:

1. When the rider is answering phone call with "KY Pro", all the other functions stop working, such as walkie-talkie intercom, bluetooth intercom, music and FM radio. But there will be "DiDi" voice reminder when there is Walkie-talkie intercom request or bluetooth intercom request during the phone answering.
2. When the rider is doing the intercom on walkie-talkie, bluetooth intercom, music and FM radio will stop working. But there will be "DiDi" voice reminder when there is bluetooth intercom request.
3. When the rider is using the bluetooth intercom, the music and FM radio can not be played. The rider can answer the walkie-talkie intercom request at any time even when the rider is answering phone call, playing music or playing FM radio. (Walkie-talkie intercom can be playing with their functions at the same time.)

14. Product Specifications

Frequency: 2.4GHz

Weight: 38g

Standby time: 1 week

dimensions: 90*40*26.5mm

Battery Capacity: 500mAh

Continual working time:

Phone intercom-11h,

Bluetooth intercom-9.5h

Charging time: about 1h

Power adaptor: DC 5V/1A

15. Battery Indicator

The battery is made of the polymer battery. Please keep the product in the dry place. If the product is not going to be used over 1 month, please charge it regularly so the product's life can be guaranteed.

1. When the battery is full, the blue light indicator will double-flash in every 2s after turned on.
2. When the battery is low enough, there will be "battery low" voice reminder in every 15s and the red light indicator will also flash in every 15s. Keep using it will make the product turn off.
3. When the product is being charged, the indicator will stay with red color. After fully charged, the red light will be off. When the battery is full and still be charged, the red indicator will flash for once and turn off immediately.
4. This product can be used when it is being charged.

保修卡

型号：KY PRO

2^年
保修期

请保存好您的购物收据、保修卡和撕毁无效标贴

姓名：_____

地址：_____

 _____

售后服务：service@fdcdz.com

故障描述：

请在保修卡后面贴上收据的复印件，以证明购买日期。

使用过程中如发现产品有故障，请联系我们的售后服务。

请确保在保修卡上填写清楚产品的故障、问题等，以便我们及时为您处理。



Warranty Card

Model Number : KY PRO

2 Year
Warranty

Please keep your purchase receipt together with your warranty card
& "invalid if removed" label

Name: _____

Address: _____



After sale service: service@fdcdz.com

Failure Description:

Please affix a copy of invoice on the back of warranty card as a proof of purchase date.
If you find any problems during use of our product, please contact our after sale service.
Please make sure that you describe the problems clearly on warranty card so that we
can handle them timely.



FreedConn[®]

20210130V0.1



FC

