


欢迎使用 KY 头盔无线耳机, 使用本产品前请先阅读此说明书。
本产品安装在头盔外部, 可与手机无线连接实现接听, 挂断电话、播放音乐等功能。

1. 按键介绍

1. 开关机键
2. 旋钮/多功能键
3. 充电插口
4. 耳机插口
5. LED指示灯

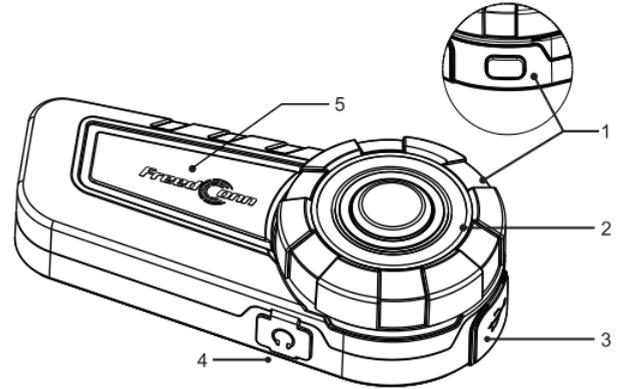

2. 如何安装

1. 主要讲解提供的两款夹子中的可拆卸式夹子 (如图1)。
2. 拨开头盔内衬, 将耳机夹子卡入头盔左边合适位置 (如图2、3)。
3. 将蓝牙主机对应夹子的孔卡入, 确保主机安装到位无松动 (如图4、5)。



4. 找到头盔离耳朵最近处, 揭开头盔内衬, 清理干净后贴上魔术贴毛面 (如图6)。
5. 将贴有魔术贴勾面的喇叭对应魔术贴毛面贴好并整理好头盔内衬 (如图7)。
6. 将耳机插头对应蓝牙主体耳机插口插入即安装完成 (如图8)。



3. 如何配对

1. 与手机配对

- (1) 需要配对的蓝牙耳机与带蓝牙的手机放在相距1米范围。
 - (2) 确定蓝牙耳机已经被关机。
 - (3) 按住蓝牙耳机的开关机键3秒, 听见一声提示音“欢迎使用Freedconn产品”, 指示灯以红色和蓝色交替闪烁时放手。
 - (4) 按照移动电话用户手册指示, 激活移动电话备有的蓝牙功能, 搜索蓝牙耳机设备。
 - (5) 选择带有“KY”字样的蓝牙设备, 然后选择手机与蓝牙耳机配对, 继而红蓝指示灯将转入蓝色灯有规律的闪动 (每6秒闪一次), 然后会听见一声提示音“蓝牙已连接”。蓝牙耳机与手机配对成功, 即可通过蓝牙耳机进行播放音乐、可接听、挂断电话。
- 注意: 优先级: 电话 > 音乐, 播放音乐时来电话, 音乐暂停, 通话结束后, 音乐自动恢复。

4. 功能及操作方法

1. 开机	关机状态下长按开关机键3秒, 未连接设备时红蓝灯交替闪烁, 开机后有“欢迎使用 freedconn产品; 配对状态”提示音。
2. 关机	开机状态下长按开关机键2秒, 红色指示灯长亮1秒, 继而熄灭, 关机后有“关机”提示音。
3. 接听电话	当有来电时按一下多功能键即可接听电话或当来电报号10秒后无任何操作时自动接听电话。
4. 拒绝接听来电	在听到来电铃声时立即按下多功能键2秒, 直至听到一声“嘀”声时松手。
5. 语音拨号	在无通话时, 连续按两下多功能键有“语音呼叫”提示音。
6. 终止通话	在手机通话时, 按下多功能键或正常使用手机电话结束通话。
7. 末码重拨	在无通话时, 长按多功能键2秒, 即可拨打最后一次拨出的电话号码。
8. 音乐播放/暂停	按一次多功能键暂停播放, 再按一下恢复播放。
9. 上/下曲	顺时针旋转一下旋钮换下一曲, 逆时针旋转一下旋钮换上一曲。
10. 增/减音量	顺时针旋转旋钮到头不放, 音量增大, 增大至你想要的音量时放手, 最大时会有“嘟嘟”提示音, 逆时针旋转旋钮到头不放, 音量减小, 减小至你想要的音量时放手。

11. 电话、音乐切换	在听立体声音乐或收音机时, 若有来电或外拨电话时, 声音将会自动切换到手机通话状态, 当通话结束后, 蓝牙耳机将会自动恢复到接电话前的状态。
12. 中/英提示音切换	蓝牙未连接手机的情况下, 连续按三下多功能键。
13. 复位功能	长按开关机键8秒。

5. 电池电量指示功能

- (1) 电池电量充足时, 开机蓝灯每6s闪1次;
 - (2) 电池电量不足时, 每1分钟有“电池电量低”提示音, 红灯6s闪一次;
 - (3) 电池正在充电时, 红灯长亮;
 - (4) 电池充电完成后, 红灯灭;
- 注: 电池容量: 500mAh, 待机168小时, 连续工作时长: 连续通话/音乐长达9小时。

6. 日常保养

- (1) 切勿将耳机放置在温度极高或极低的地方, 最佳存放环境为-40度到+60度, 否则会影响耳机的使用寿命;
- (2) 切勿将耳机暴露在明火之中, 避免爆炸危险;
- (3) 切勿将耳机接触尖锐对象, 会造成划痕或损坏;
- (4) 切勿尝试拆卸耳机;
- (5) 如长时间不使用耳机, 请确保放置在干燥的地方, 若放置超过一个月要按时给与充电, 以保证电池及耳机的工作性能。

保修卡

型号: KY

请保存好您的购物收据、保修卡和撕毁无效标贴

2年
保修期

姓名: _____
地址: _____

售后服务: service@fdcdz.com

故障描述:


请在保修卡后面贴上收据的复印件, 以证明购买日期。
使用过程中如发现产品有故障, 请联系我们的售后服务。
请确保在保修卡上填写清楚产品的故障、问题等, 以便我们及时为您处理。

Welcome to use "KY" model helmet wireless headset. Please read the instructions before using the product.

This product should be installed on the outside surface of the helmet. It supports to connect with the phones wirelessly, enabling to answer the phone calls, hand up the phone calls, play bluetooth music and so on.

1. Ports and Buttons Introduction

- 1. ON/OFF Button
- 2. Wheel/ Multi-function Button
- 3. Charging Port
- 4. Headphone Port
- 5. LED Indicator

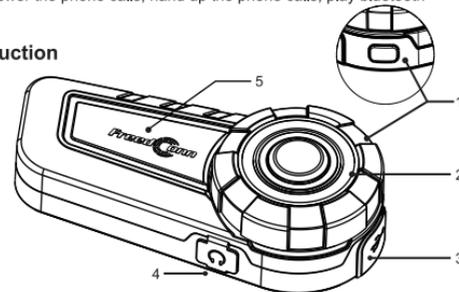

2. How to install

- 1. Each pack includes Velcro Clip and Detachable Clip. Here we show how to use Detachable Clip. (Pic. 1)
- 2. Remove the helmet lining of the bottom edge on the left side and insert the metal clip into the edge of the helmet. (Pic. 2-3)
- 3. Place the "KY" bluetooth onto the plastic clip firmly according to the slot on the clip and then fix it onto the metal clip according to the hole without any loose. (Pic. 4-5)



- 4. Find the nearest points to the ears on the helmet edge. Then open the helmet lining and paste the Velcro tapes onto the inner surface of the helmet. (Pic. 6)



Picture-6



Picture-7



Picture-8

- 5. Paste the Speakers onto the Velcro tapes and then re-cover the helmet lining properly. (Pic. 7)

- 6. Plug the headphone into the port to finish the installations. (Pic. 8)

3. How to pair KY with other devices

1. Pair with your phone

- (1) Place the KY bluetooth near your Phone within 1 meter.
- (2) Keep the KY bluetooth turn off.
- (3) Press and hold the On/Off button on KY bluetooth until the indicator becomes flashing blue and red color. During this operation, you will hear the voice "Welcome to use FreedConn product".
- (4) Activate the Bluetooth function on your phone so your phone will automatically search for the available bluetooth devices.
- (5) Find the "KY" on the bluetooth list and then choose to connect. After connected successfully, you will hear the "connected" reminder and the blue & red color on "KY" will become regular blue color in every 6 seconds interval. Now you could enjoy the bluetooth music, answer phone calls and hand up the phone calls on "KY".

Note: Phone Calls' priority > Bluetooth Music priority. For example, if there is an coming phone call when the bluetooth music is playing, then the music will be suspended. After ending the phone call, the bluetooth music will be resumed automatically.

4. Functions and operating method

1. Turn on	Press and hold the On/Off button for 3s, you will hear "Welcome to use FreedConn Product" and "Pairing" reminder when it is not connected with other devices, the indicator will remain the flashing Blue&Red colors.
2. Turn off	Press and hold the On/Off button for 2s and then the indicator will become red color for 1s. You will hear the "Power Off" reminder after successfully.
3. Answer Phone Calls	Press the Multi-function button for once to answer the coming phone call. And if the coming phone call lasts 10s, it will answer the phone call automatically.
4. Reject Phone Calls	Press and hold the Multi-function button (for 2s) until hearing "Di" reminder.
5. Voice dialing	Quickly press the Multi-function button for 2 times to activate the voice dial function.
6. End Phone Calls	Press the Multi-function button for once to end the phone call before hanging up. And you could also do it on your phone.
7. Redial the last number	Press and hold the Multi-function button for 2s to dial the last calling number.
8. Play/pause music	Press the Multi-function button for once to suspend the music and one more press will resume the music.
9. Last/Next Song	Turn the wheel clockwise for once to play next song and turn the wheel anti-clockwise for once to play last song.

10. Volume Up/Down	Turn the wheel clockwise to the end and hold it until the volume rises to your preferred level. Turn the wheel anti-clockwise to the end and hold it until the volume decreases to your preferred level. When it reaches to the Maximum or Minimum level, there will be "Beep" reminder.
11. Switch between calls and music	If there is an coming phone call or making a phone call when the bluetooth music or FM radio is playing, then the music or FM radio will be suspended. After ending the phone call, the bluetooth music or FM radio will be resumed automatically.
12. Switch between Chinese and English reminder	Quickly press the Multi-function button for 3 times to switch the voice reminder between Chinese and English.
13. Reset function	Press and hold the On/Off button for 8s.

5. Battery Volume Indicators

- (1) When the battery is full, the blue indicator will flash every 6s after turn on.
 - (2) When the battery is low, the red indicator will flash every 6s. And you will hear "Battery Low" in every 1 minute.
 - (3) When the product is being charged, the indicator will keep with red color.
 - (4) When the product has been fully charged, the red indicator will be faded.
- Note:** The battery capacity: 500mAh, standby time: up to 168 hours, continuous working time: up to 9 hours for continuous calls and music playing.

6. Daily Maintenance

- (1) The best storage environment is -40 degrees to +60 degrees. Never place the headset in a place with an extremely high or low temperature, otherwise the service life of the headset may be affected.
- (2) Never expose the earphone to open fire so as to avoid the risk of explosion.
- (3) Never cause the earphone to contact with sharp objects, which may cause scratches or damage.
- (4) Never attempt to remove the headset.
- (5) If you intend not to use the earphone for an extended period of time, be sure to always keep it in a dry place. If it is not used for more than one month, please charge it on time so as to ensure the working performance of the battery and the earphone.

Warranty Card

Model Number : KY

2 Year Warranty

Please keep your purchase receipt together with your warranty card & "invalid if removed" label

Name: _____

Address: _____

After sale service: service@fdcdz.com

Failure Description:

Please affix a copy of invoice on the back of warranty card as a proof of purchase date. If you find any problems during use of our product, please contact our after sale service. Please make sure that you describe the problems clearly on warranty card so that we can handle them timely.